


▶ BMT 1500S



▶ BMT 1500V

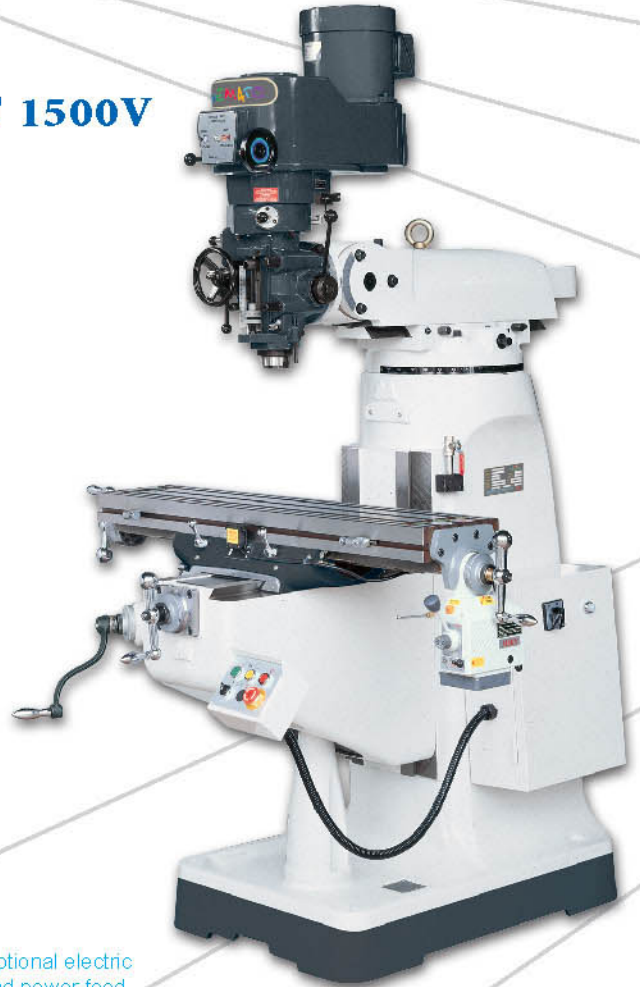

*Pictures shown with optional electric box & control panel and power feed.

- Quill dia. 86mm
- Turcite-B coated on X & Y saddle
- X, Y slide ways hardened & ground
- Hardened table
- One shot lubrication
- 2HP step speed head (1500S)
- 3HP vari. speed head (1500V)
- Meehanite casting

STANDARD ACCESSORIES:

- Forward & reverse switch
- One shot lubrication
- One piece draw bar
- Tools & tool box

OPTIONAL ACCESSORIES:

- Electric box & control panel
- Power feeds for X, Y & Z axis
- Coolant pump
- Chip tray
- NT40 spindle (Dia. 86mm quill)
- NT40 spindle (Dia. 100mm quill)
- 230 x 1245mm table
- 2 speeds motor (16 speeds)

SPECIFICATION:

Description	BMT 1500S	BMT 1500V
Table size	230 x 1067 mm	
Longitudinal travel, manual	720 mm	
Cross travel, manual	300 mm	
Vertical travel, manual	400 mm	
Table T-slot (W x No. x pitch)	16 x 3 x 63 mm	
Spindle motor	2 HP	3 HP
Spindle speed (60HZ, RPM)	8 steps 80~2720	vari. speeds 60~4200
Spindle taper	R8 / ISO 30	
Spindle nose to table top	57~463 mm	
Spindle center to column surface	213~533 mm	
Quill travel	127 mm	
Auto. quill feeds (per revolution)	0.04 / 0.08 / 0.15 mm	
Head swivel	(R & L) 45° (F & B) 45°	
Ram travel	320 mm	
Net weight (approx.)	1980 lbs (900 kgs)	